




STANDARD KIT




Dish




Base



Router



Starlink Cable
15.2 m
(50 ft)




AC Cable
1.8 m
(6 ft)

DISH




513 mm
(20.2 in)

303 mm
(11.9 in)

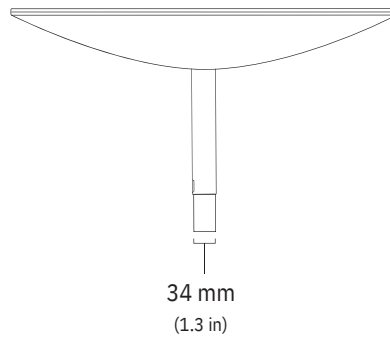


34 mm
(1.3 in)


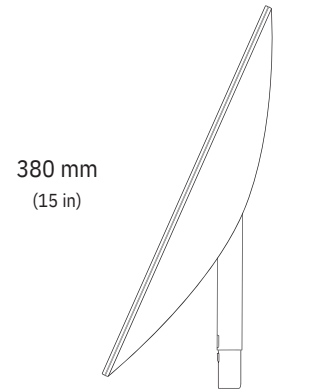


380 mm
(15 in)





544 mm
(21.4 in)

Antenna	Electronic Phased Array
Field of View	100°
Orientation	Motorized Self Orienting
Dish Weight	2.9 kg (6.4 lbs) without Cable 3.6 kg (7.9 lbs) with 15.2 m (50 ft) Cable
Environmental Rating	IP54
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Wind Speed	Operational: 80 kph+ (50 mph+)
Snow Melt Capability	Up to 40 mm / hour (1.5 in / hour)
Power Consumption	Average: 50-75 W

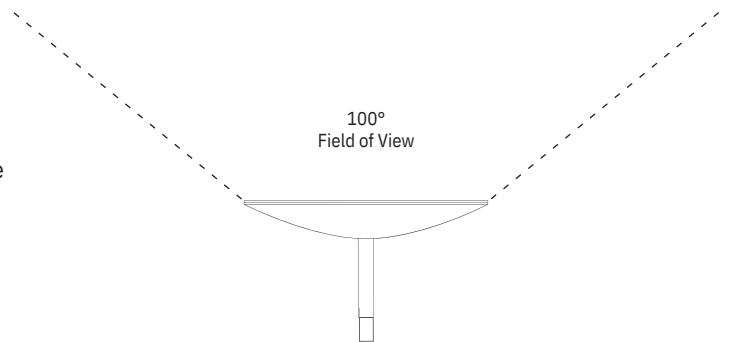

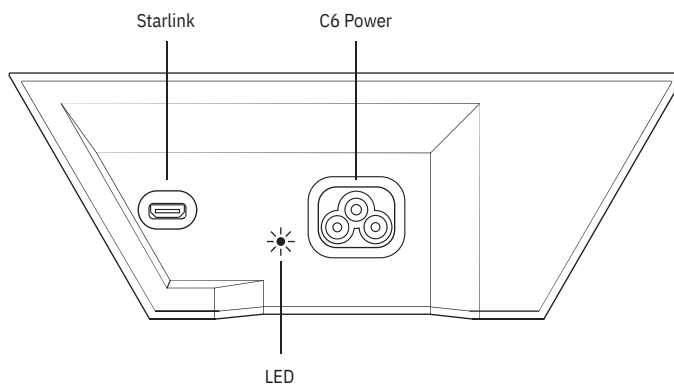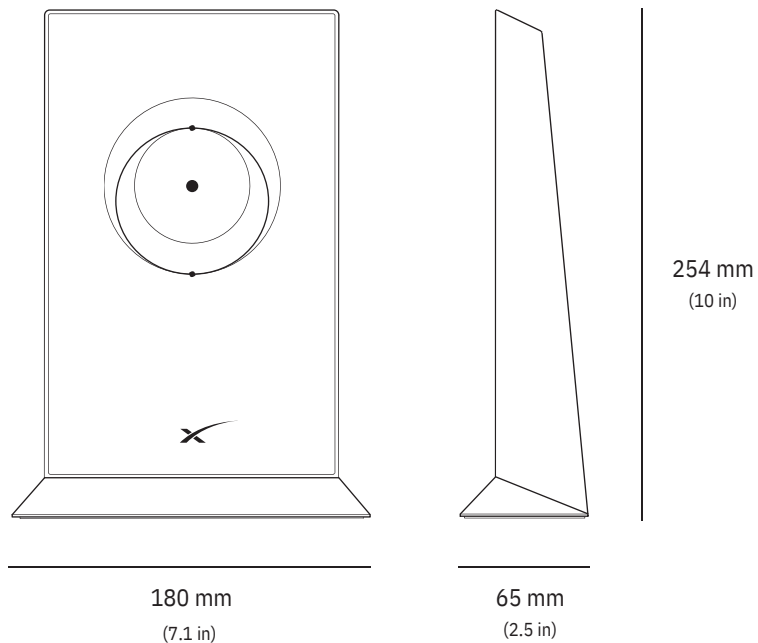


Wi-Fi Technology	802.11ac Dual Band
Generation	Wi-Fi 5
Radio	Dual Band -3 x 3 MIMO
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Weight	1 kg (2.2 lbs)
Security	WPA2
Range	Up to 185 m ² (2000 ft ²) *Varies on placement, interference, and building materials
Environmental Rating	IP54 - Configured for Indoor Use
Power Indicator	White LED Base of Router
Mesh Compatibility	Compatible with up to 12 Starlink Nodes
Devices	Connect up to 128 devices

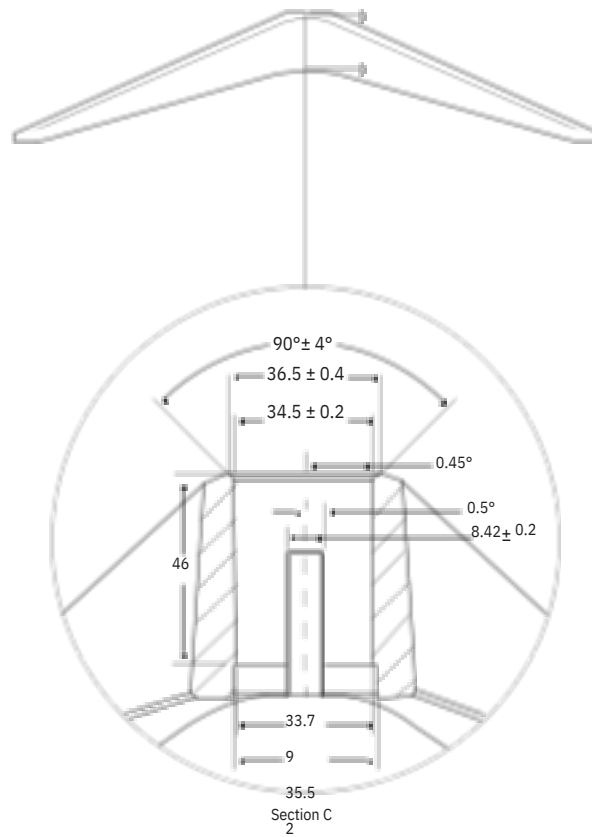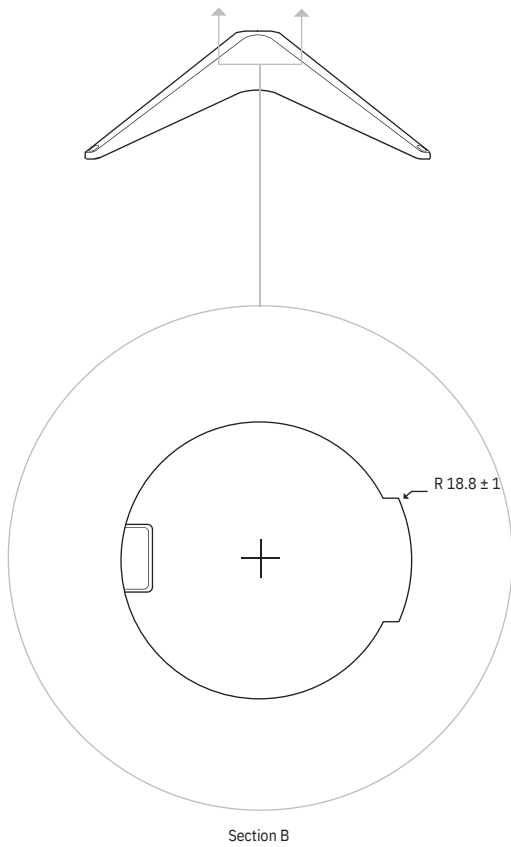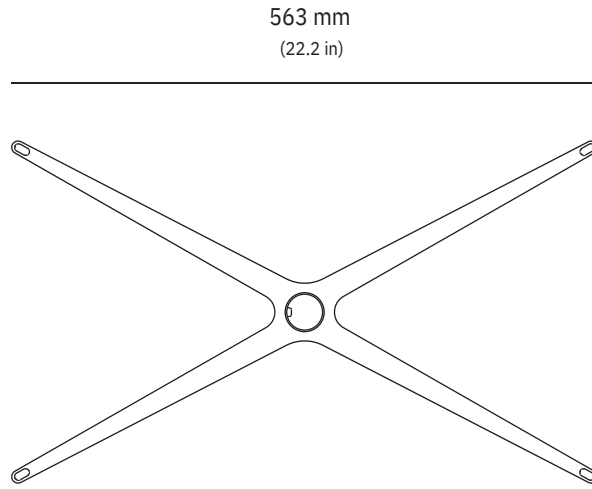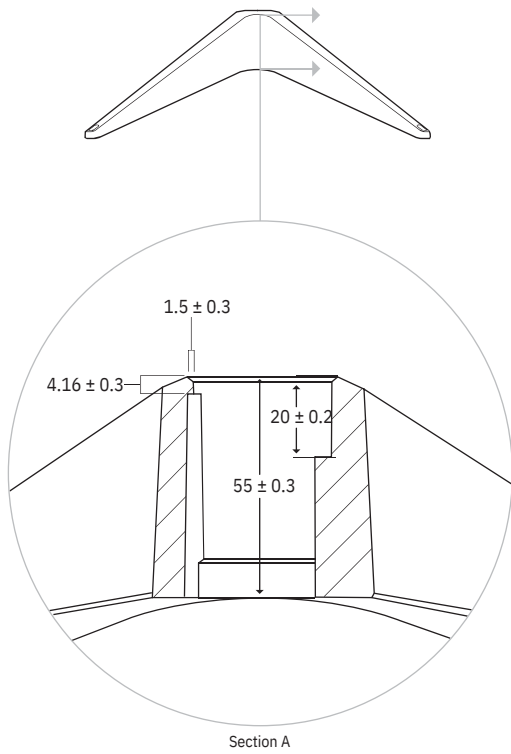

122 mm
(4.8 in)

STANDARD STARLINK CABLE | NOT INCLUDED

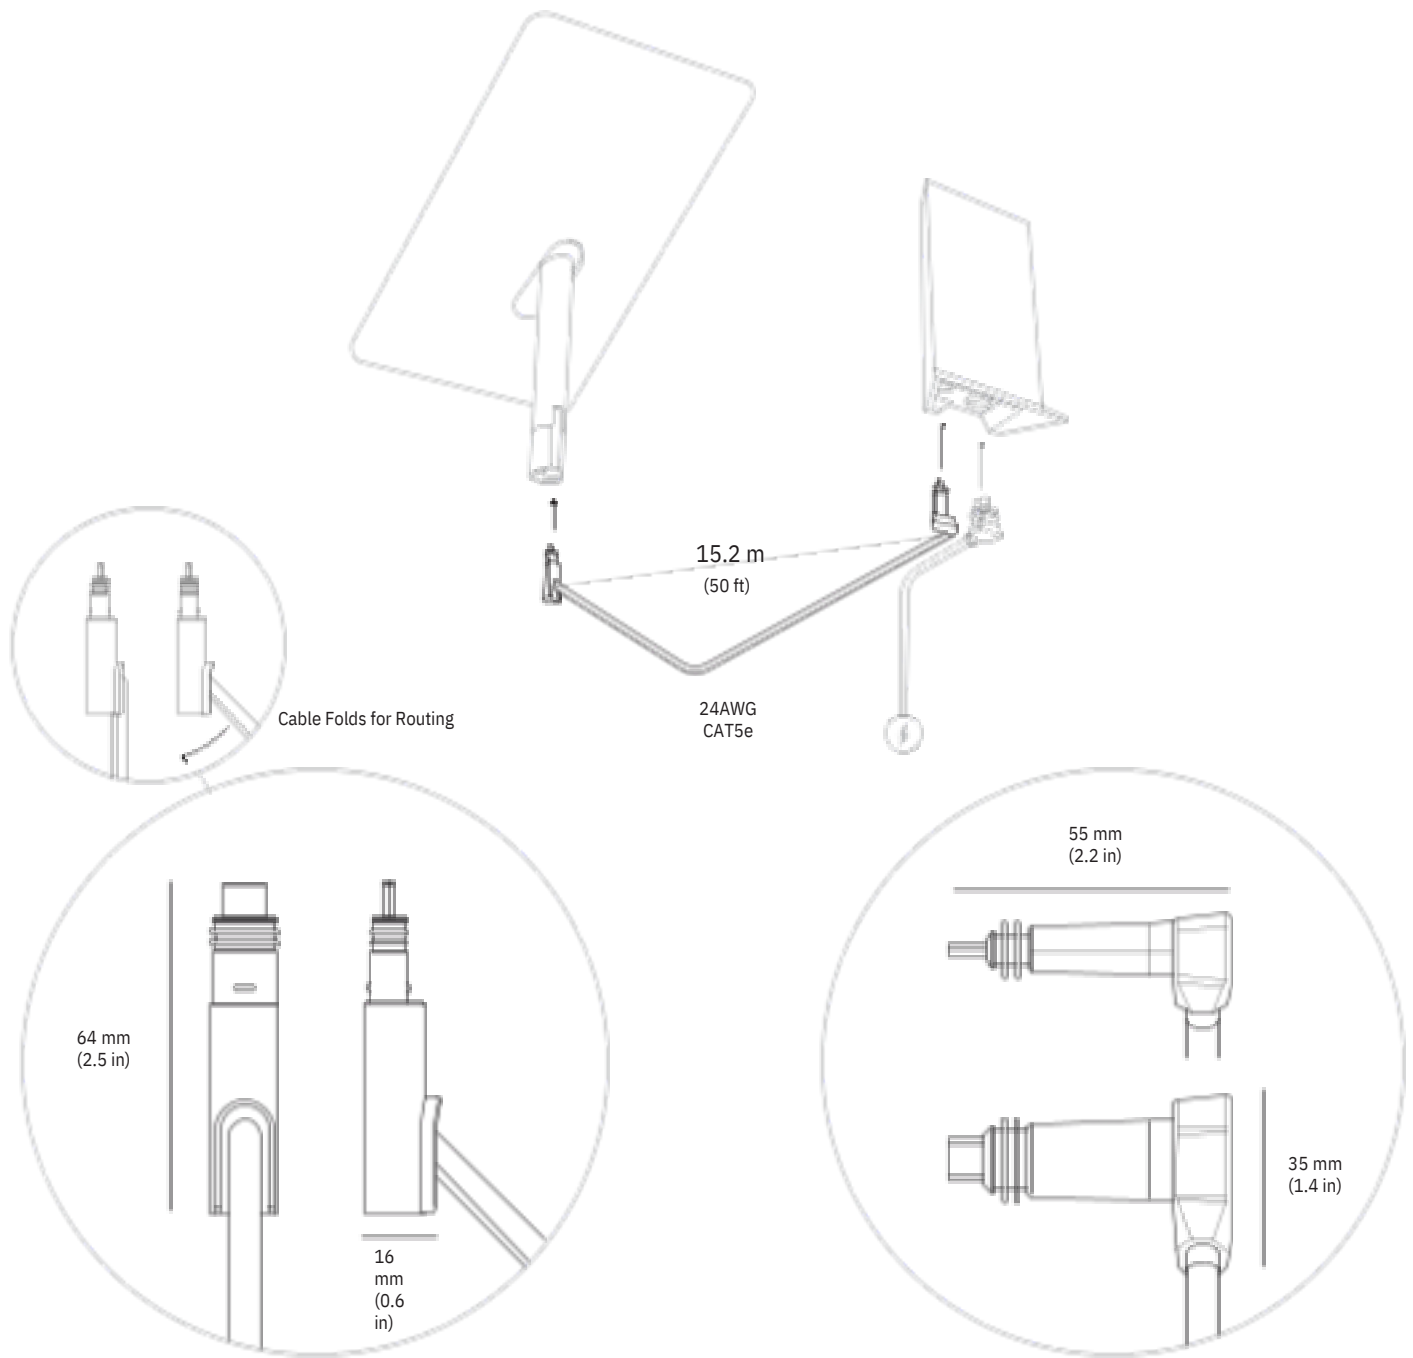

End	Pin	Ethernet Pin	Wire Color	Pin	End
Dish	A1, A2	B+	Orange White	A1, A2	Wi-Fi
	A3, A4	B-	Orange	A3, A4	
	A5, A6	A+	Green White	A5, A6	
	A7, A8	A-	Green	A7, A8	
	B1, B2	--	N / C	B1, B2	
	B3, B4	--	N / C	B3, B4	
	B5	D+	Brown White	B5	
	B6	D-	Brown	B6	
	B7	C-	Blue White	B7	
	B8	C+	Blue	B8	
	B9, B10	--	N / C	B9, B10	
	B11, B12	--	N / C	B11, B12	
	Shield Can		Drain Wire	Shell	

