




**What's In The Box**




Standard



Kickstand




Gen 3 Router




Starlink Cable

15 m  
(49.2 ft)



AC Power Cable

1.5 m  
(4.92 ft)




Power Supply



1.5 m  
(4.92 ft)

**Package Weight:** 6.73 kg (14.83 lbs)

**Package Dimensions:** 652.4 x 451.7 x 97.9 mm (25.69 x 17.78 x 3.84 in)


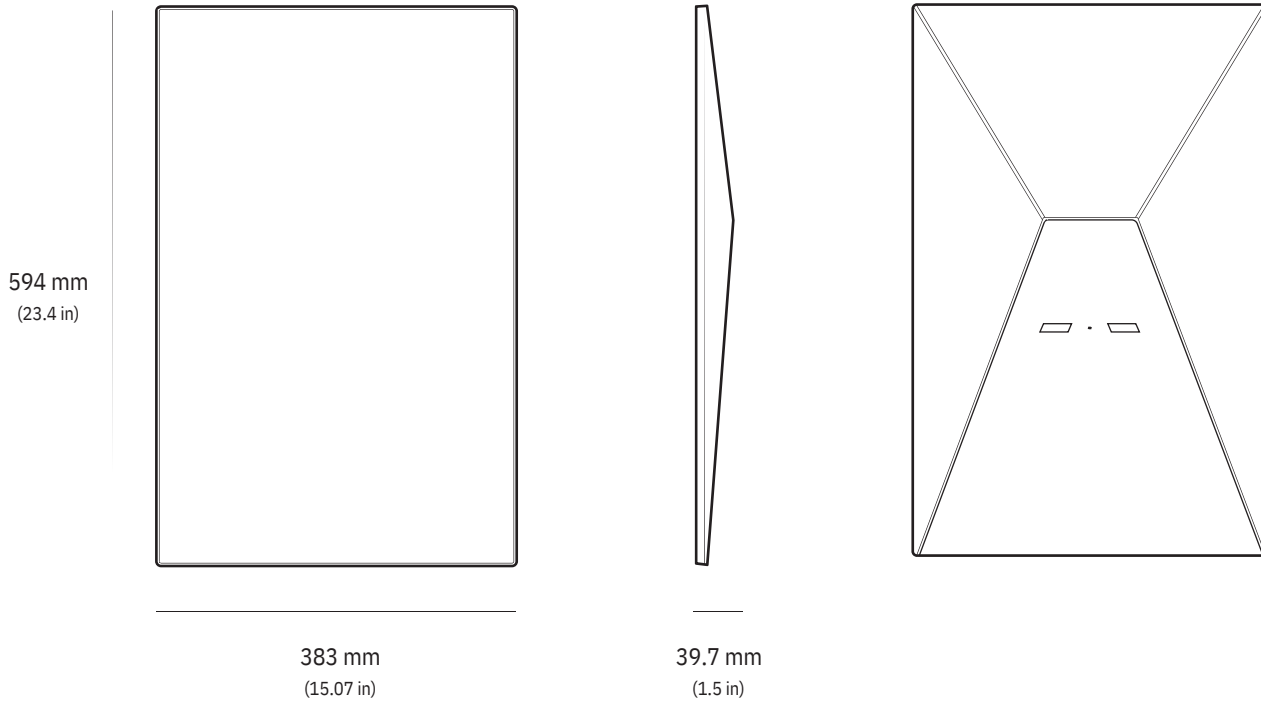


<b>Antenna</b>	Electronic Phased Array
<b>Field of View</b>	110°
<b>Orientation</b>	Software Assisted Manual Orienting
<b>Weight</b>	2.9 kg (6.4 lb) 3.2 kg (7 lb) with Kickstand 3.8 kg (8.3 lb) with Kickstand & 15 m Cable
<b>Environmental Rating</b>	IP67 Type 4
<b>Operating Temperature</b>	-30°C to 50°C (-22°F to 122°F)
<b>Wind Speed</b>	Operational: 96 kph+ (60 mph+)
<b>Snow Melt Capability</b>	Up to 40 mm / hour (1.5 in / hour)
<b>Power Consumption</b>	Average: 75 - 100 W

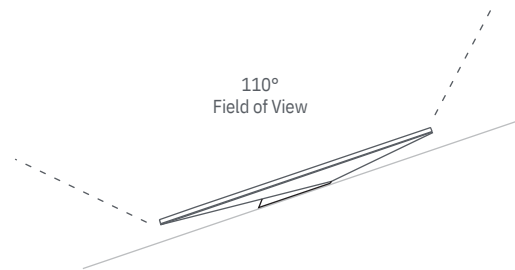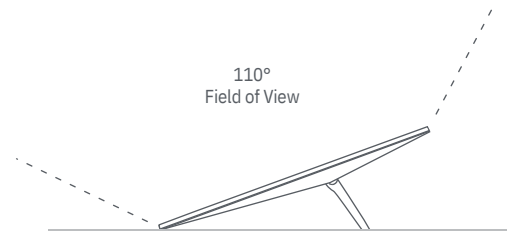


# KICKSTAND


142 mm  
(5.6 in)

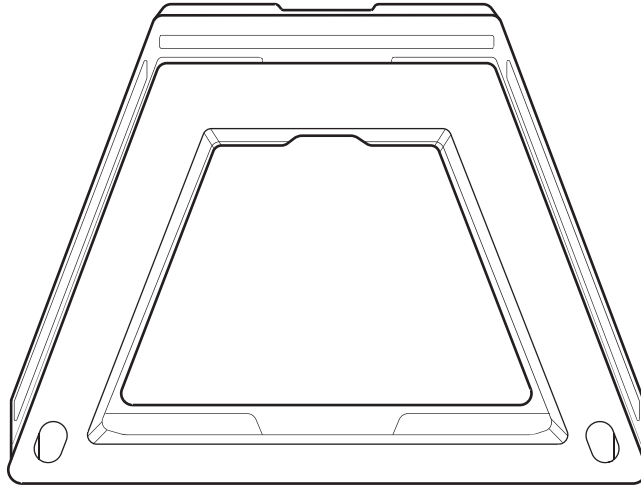

184 mm  
(7.2 in)



27.4 mm  
(1.1 in)

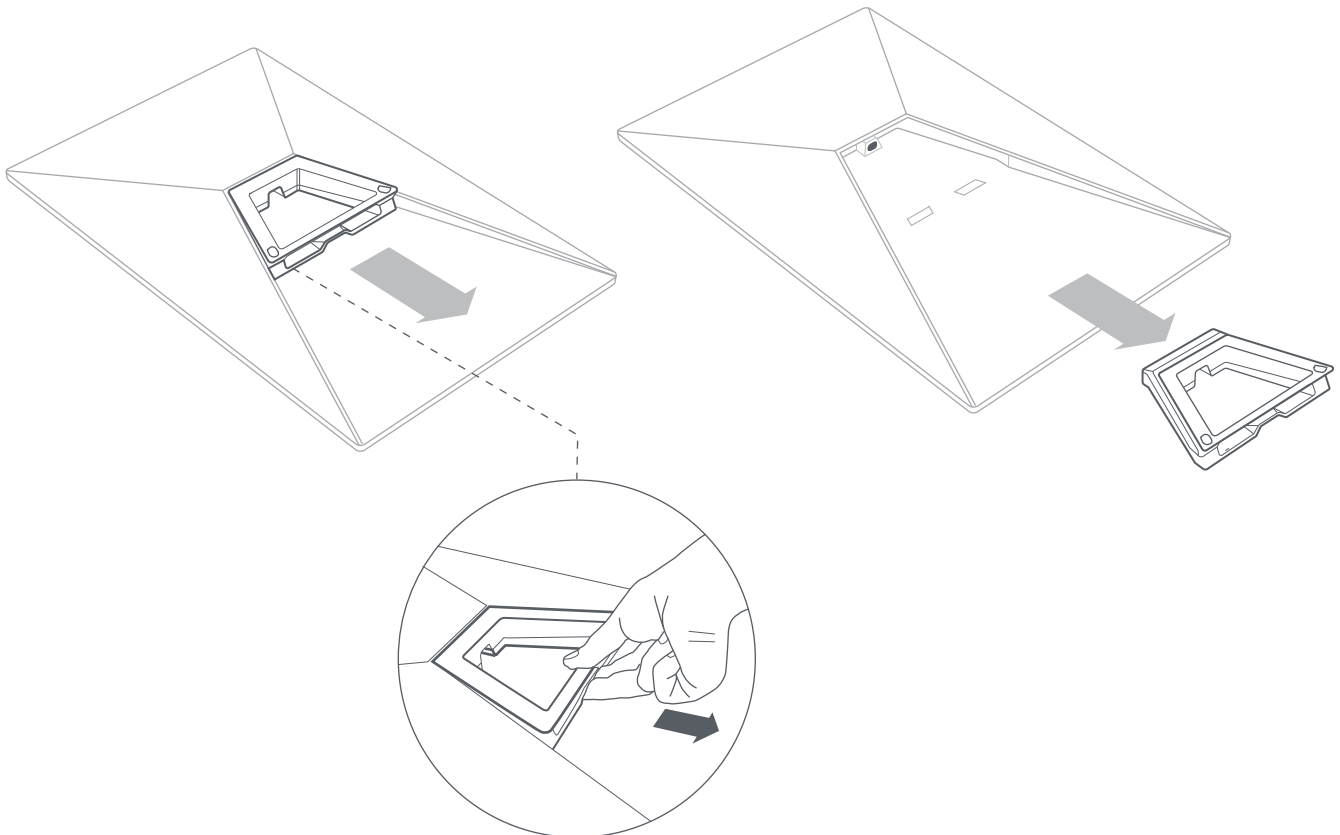

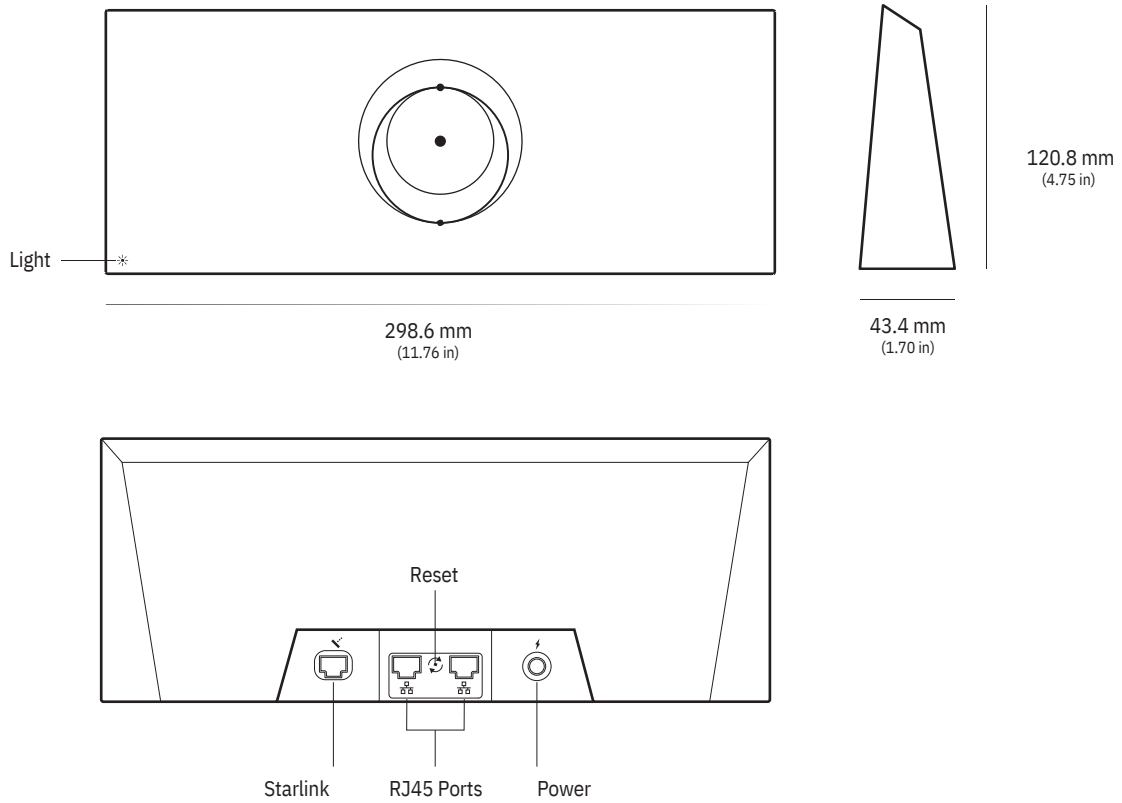


<b>Product Dimensions</b>	43.4 x 298.6 x 120.4 mm (1.7 in x 11.76 in x 4.74 in)
<b>Wi-Fi Technology</b>	802.11 a/b/g/n/ac/ax
<b>Generation</b>	WiFi 6
<b>Radio</b>	Tri Band 4 x 4 MU-MIMO
<b>Ethernet Ports</b>	Two (2) Latching Ethernet LAN ports with removable cover
<b>Coverage</b>	Up to 297 m <sup>2</sup> (3,200 ft <sup>2</sup> )
<b>Operating Temperature</b>	-30°C to 50°C (-22°F to 122°F)
<b>Weight</b>	0.57 kg (1.25 lbs)
<b>Security</b>	WPA2
<b>Environmental Rating</b>	IP56 Rated (Water Resistant), configured for indoor use
<b>Power Indicator</b>	LED   face plate, lower left corner of router
<b>Mesh Compatibility</b>	Compatible with Starlink Gen 2 and Gen 3 Mesh Nodes, up to 3 Starlink Mesh Nodes  *Not compatible with 3rd party mesh systems
<b>Devices</b>	Connect up to 235 devices

# POWER SUPPLY

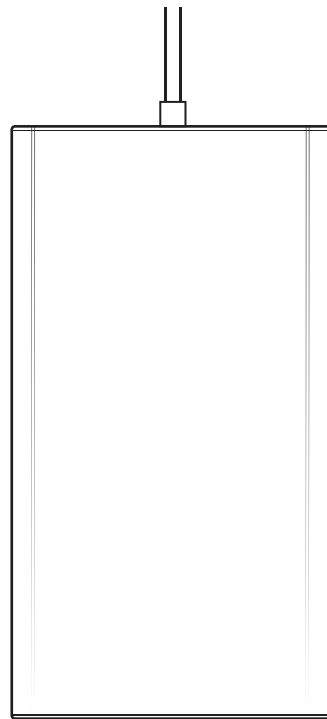


173 mm  
(6.8 in)





35.75 mm  
(1.4 in)

93 mm  
(3.66 in)

<b>Product Dimensions</b>	173 x 93 x 35.75 mm (6.8 in x 3.66 in x 1.4 in)
<b>Weight</b>	0.65 kg (1.43 lbs)
<b>Environmental Rating</b>	IP66 Type 4
<b>Operating Temperature</b>	-30°C to 60°C (-22 to 140°F)
<b>Power Specifications</b>	100-240V ~ 2.5A 50 - 60 Hz

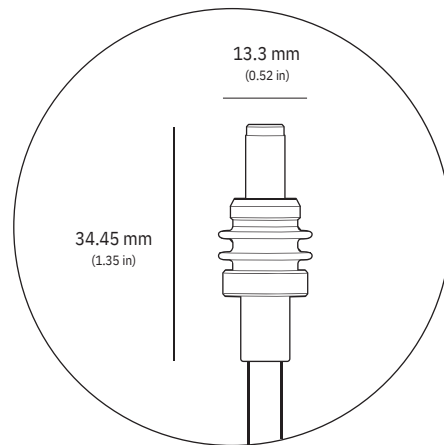


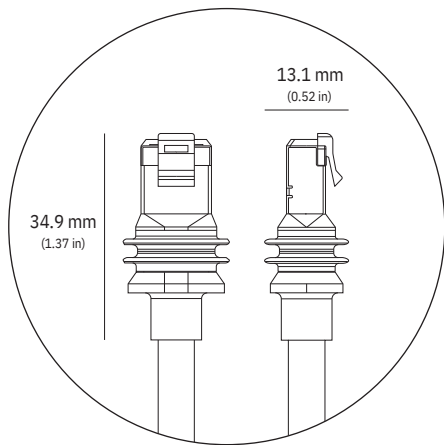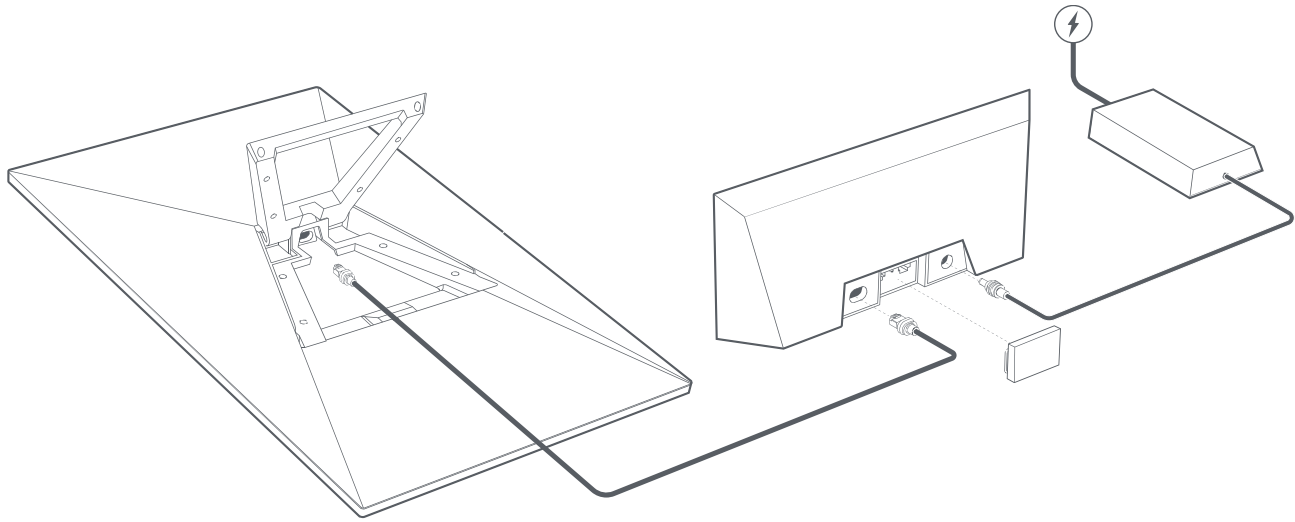

**Pin 1**  
Shield  
8  
7  
6  
5  
4  
3  
2  
1

**Wire Color**  
Drain - Bare Wire  
Brown  
White / Brown  
Green  
White / Blue  
Blue  
White / Green  
Orange  
White / Orange

**Pin 2**  
Shield  
8  
7  
6  
5  
4  
3  
2  
1

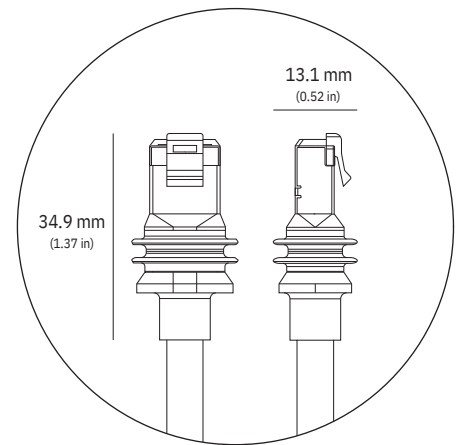

# POWER SUPPLY CABLE

